


ARTICULATED PIG SPECIFICATION

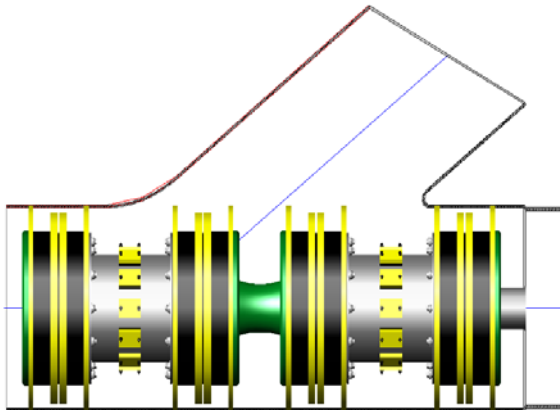


Application


Articulated pigs designed for negotiating Wye connections, bridging line features and pigging around various bend radiuses. This type of pig is also highly efficient in long run dewatering/flooding operations as well as dual-diameter applications..

General Information

The details shown are for common pigs, however various optional extras are available, some of which are listed below:-

- Cleaning Brushes
- Dewaxing / Descaling Pads
- Gauging Plate
- Polyurethane Bumper Nose or Retaining Flange
- Tracking Device
- Long Run Support Discs
- High Performance Polyurethane
- Stainless Steel Body
- Support Wheels
- Pluggable Bypass Ports
- Jetting Head
- Magnet Pack

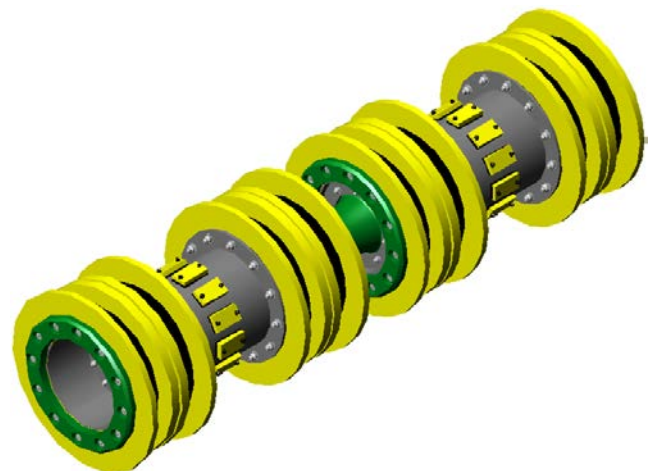

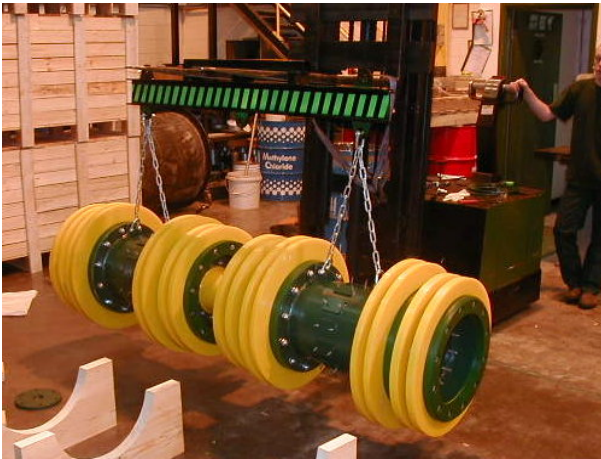

PROJECT DETAIL

Project Name	Nam Con Son Pipeline Project
Customer	BJ Process and Pipeline Services
End Customer	BP (Vietnam)

Project Description

Propipe Limited supplied 26" articulated pigs to BJ Process and Pipeline Services – Vietnam for commissioning the 372-km Nam Con Son gas pipeline in 2002. The 26" articulated pigs were developed for the pigging of a subsea wye piece, during flooding, cleaning and dewatering operations.

Because the pig was required to endure stopping and starting operations the pig needed to weigh less than conventional pigs in order to prevent seal damage. A new design of articulated wire rope & polyurethane joint was developed to withstand twice the calculated load and to reduce the pig weight.

